




b.o.b. Sistemi Idraulici S.p.A.

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001/2000 =

HOOKLIFT « BT 20 »

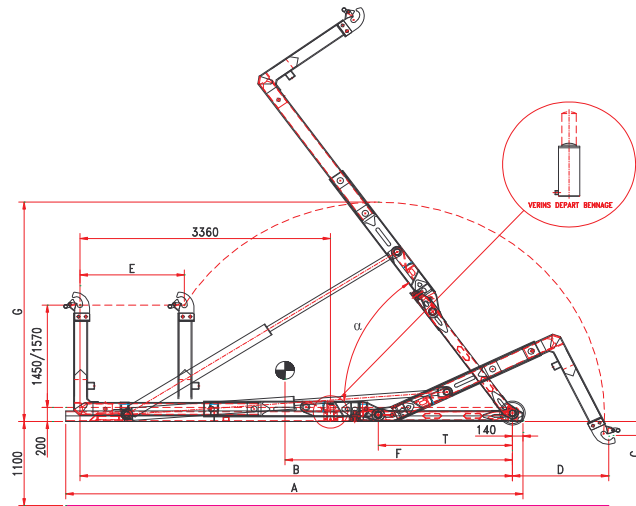

MODEL	A	B	C		D		E	F	G		T	Weight kit	Tipping Angle	Container length min./ max
			1.450	1.570	1.450	1.570			1.450	1.570				
BT 20 XC	5.750	5.400	140	240	1.500	1.550	1.200	3.120	3.140	3.200	1.600	2.400	57°	4.400 - 6.200
BT 20 C	5.950	5.600	140	240	1.500	1.550	1.400	3.150	3.140	3.200	1.600	2.425	57°	4.400 - 6.400
BT 20 N	6.150	5.800	140	240	1.300	1.350	1.400	3.300	3.140	3.200	1.800	2.450	54°	4.600 - 6.600
BT 20 NL	6.350	6.000	140	240	1.100	1.150	1.400	3.450	3.140	3.200	2.000	2.475	51°	4.800 - 6.800
BT 20 L	6.550	6.200	140	240	900	950	1.400	3.600	3.140	3.200	2.200	2.500	48°	5.000 - 7.000

Lifting capacity ton. 20

Hook level mm. 1.450/1570

Telescopic and articulated arm mm. 1.200 – 1.400

Front / lateral oil tank

Container external hydraulic locking

Tipping Start Cylinders (standard)

Security system interlock

Painting: in chassis colour

CE Redaction with certification and operation manual and spare parts book

Kit box

Optionals:

Regenerating oil system (double speed) on hand board

Pneumatic hook security with hand board switch control

Vertical stabilizer

Rear foldable stabilizer

Extra hydraulic section with ground hand lever or with hand board control

The technical details shown in this sheet are indicative and can be changed by the builder without prior notice.

B.O.B. Sistemi Idraulici S.p.A. – Regione Oltre Rea, 61 – 12060 Monchiero (CN) - Italia

P. I.V.A. 00496180043 - Tel.: +39 (0173) 780002/3 – Fax: +39 (0173) 780004

Internet: www.bobspa.com - e-mail: info@bobitalev.com