b.o.b. Sistemi Idraulici S.p.A.

MULTICARGO TRAILER SYSTEM

COMPANY WITH QUALITY SYSTEM CERTIFIED BY DNV =ISO 9001/2000=

3 AXLES HOOKLIFT TRAILER « R 26 ITS»

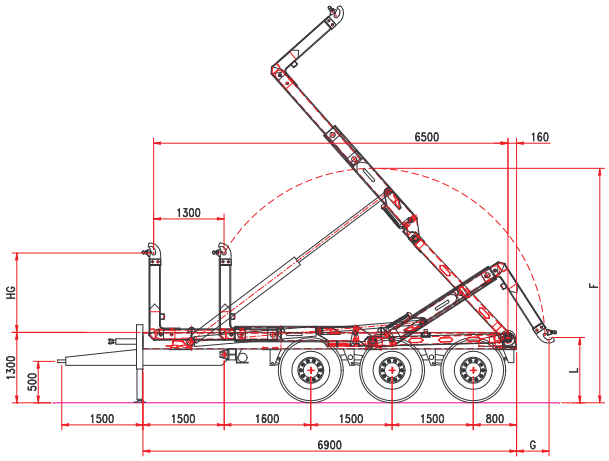

CHASSIS

Frame section	300 x 100
Leafspring suspensions	Tridem 36 tons
Axles WHB	1.500/1.800 mm
Axles section	3x140
Axles	steering+fixed+steering
Brake drum	406 x 120
Braking system	hydraulic
Draw bar	silent blocks
Towing eye	fixed
Draw bar support feet	2 x hydraulic
Chassis loading level	1.300 mm

OLEODYNAMIC SYSTEM

Tractor hydraulic	1 controls d/act
Piston pump	100 lt
RPM	1.000
Oil tank	120 l
Pump max. pressure	350 bar
Radio control	standard

TELESCOPIC ARM

run	1.300
Hook level	1.430/1.460/1.570
Container external locking	hydraulic
Tipping angle	45°
Tipping capacity	26 ton
Lifting capacity (according to hook level)	26 ton

TRAILER WEIGHT AND DIMENSIONS

Gross Trailer Weight (G.T.W.)	33 ton
Tare	8.500 kg
Container handling cap.	5.500/7.500 mm.
Max speed	40 km/h

OPTIONALS

Articulated arm (+ telescopic standard)
Axle WHB 1800 mm
Steering axle BPW
Axle hydraulic steering with draw bar equalizer
Axle hydraulic steering BPW with draw bar equaliz.
Hydraulic suspensions
Hydraulic draw bar
Pneumatic braking system
Hydraulic-pneumatic braking system
Modular pneum. braking system leaf springs susp.
Modular pneum. braking system hydr. suspensions
Industrial axles with brakes 420x180
and with axles section 150 mm x track 2.150
BPW brakes 410 x 180 axles sect.150 mm x2.150
Towing eye ball type diam. 80 mm Scharmueller
Towing hook Rockinger with electric and ABS
braking connection
Container front hydraulic locking
Additional hooklift flow control element
Regenerating oil system (double speed)
Automatic greasing system electropneumatic

The technical details shown in this sheet are indicative and can be changed by the builder without prior notice.

B.O.B. Sistemi Idraulici S.p.A. – Regione Oltre Rea, 61 – 12060 Monchiero (CN) - Italia
P. I.V.A. 00496180043 - Tel.: +39 (0173) 780002/3 – Fax: +39 (0173) 780004
Internet: www.bobspa.com - e-mail: info@bobitalev.com